



ISOLATED PIN OF POLYMERIC CONCRETE (AA 13)

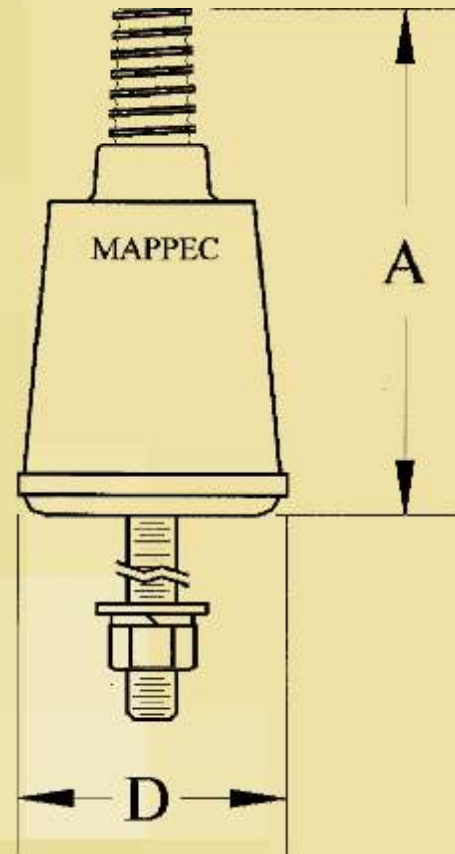

ISOLATED PIN OF POLYMERIC CONCRETE (AA 13)

DESCRIPTION	
NOMINAL HEIGHT (MM)	165
MAXIMUM DIAMETER (MM)	90
LEAKAGE DISTANCE (MM)	105
ARC DISTANCE (MM)	120
CFO (+) (KV)	110
DIELECTRIC STRENGTH (2 TIMES THE CFO)	
WITH FRONT WAVE OF 2000 KV/MS	220
MECHANICAL RESISTANCE (KN)	3.92

**ISOLATE PIN WITH POLYMERIC CONCRETE AND
INSULATOR OF PORCELAIN ANSI 55-4**

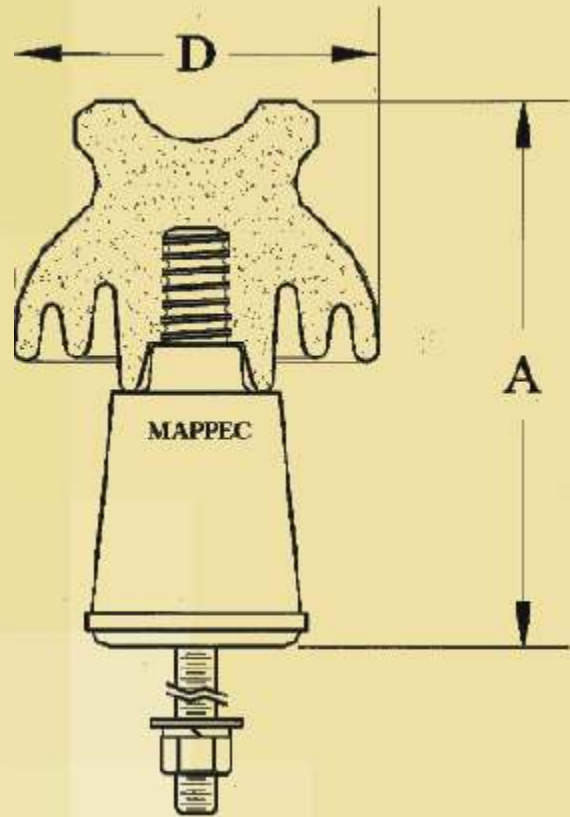

SET

**ISOLATE PIN WITH POLYMERIC CONCRETE
AND INSULATOR OF PORCELAIN ANSI 55-4**

DESCRIPTION	
RATED VOLTAGE (KV)	13,2
NOMINAL HEIGHT (MM)	212
NOMINAL DIAMETER (MM)	146
NOMINAL VALUE "X" (MM)	136.90
NOMINAL VALUE "Y" (MM)	12.00
NOMINAL VALUE "Z" (MM)	82.00
CFO (+) (KV)	90
DRY FLASHOVER VOLTAGE 60 HZ- (KV)	35
WET FLASHOVER VOLTAGE 60 HZ (KV)	25
MECHANICAL RESISTANCE (KN)	3,924

