


SURGE ARRESTER WITH POLYMERIC CONCRETE HOUSING (ADOM 22A)

DESCRIPTION	
	ADOM 22
NOMINAL HEIGHT (MM)	235
MAXIMUM DIAMETER (MM)	100
ARC DISTANCE (MM)	45
CFO (+) (kV)	115
DIELECTRIC RESISTANCE 5.0 KVCD (MΩ)	1000
NOMINAL CURRENT (kA)	5
MECHANICAL RESISTANCE (kN)	3.924
PARTIAL DISCHARGE (PC)	< 3

**SURGE ARRESTER WITH POLYMERIC CONCRETE HOUSING (ADOM 22A)
AND PIN INSULATOR OF PORCELAIN ANSI 56-1, 56-2**

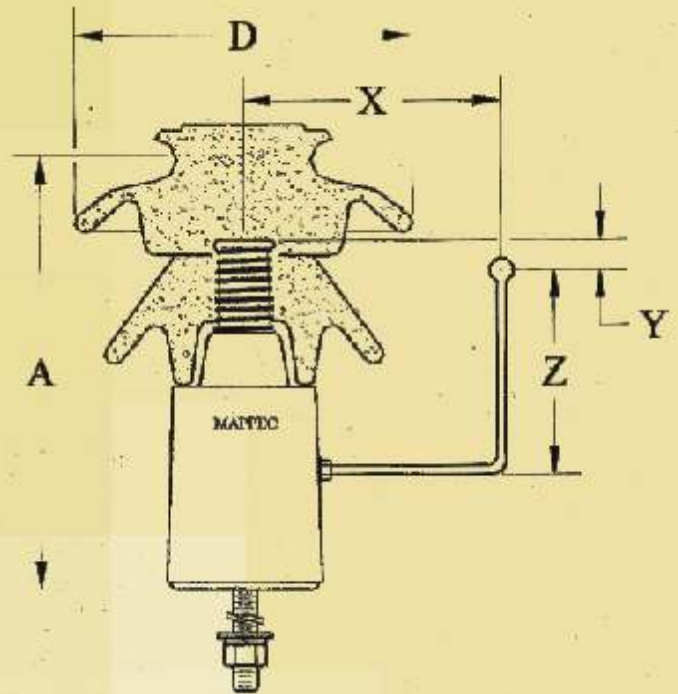

SET

**SURGE ARRESTER WITH POLYMERIC
CONCRETE HOUSING (ADOM 22A)
AND PIN INSULATOR OF
PORCELAIN ANSI 56-1, 56-2**

DESCRIPTION	
	ADOM 22
NOMINAL HEIGHT (MM)	235
MAXIMUM DIAMETER (MM)	100
ARC DISTANCE (MM)	45
CFO (+) (kV)	115
DIELECTRIC RESISTANCE 5.0 KVCD (MΩ)	1000
NOMINAL CURRENT (kA)	5
MECHANICAL RESISTANCE (kN)	3.924
PARTIAL DISCHARGE (PC)	< 3

