


SURGE ARRESTER WITH POLYMERIC CONCRETE HOUSING (ADOM 33A)

DESCRIPTION	
	ADOM 33
NOMINAL HEIGHT (MM)	300
MAXIMUM DIAMETER (MM)	110
ARC DISTANCE (MM)	65
CFO (+) (kV)	150
DIELECTRIC RESISTANCE 5.0 KVCD (MΩ)	1000
NOMINAL CURRENT (kA)	5
MECHANICAL RESISTANCE (kN)	3.924
PARTIAL DISCHARGE (PC)	< 3

SURGE ARRESTER WITH POLYMERIC CONCRETE HOUSING (ADOM 33A) AND PIN INSULATOR OF PORCELAIN ANSI 56-3

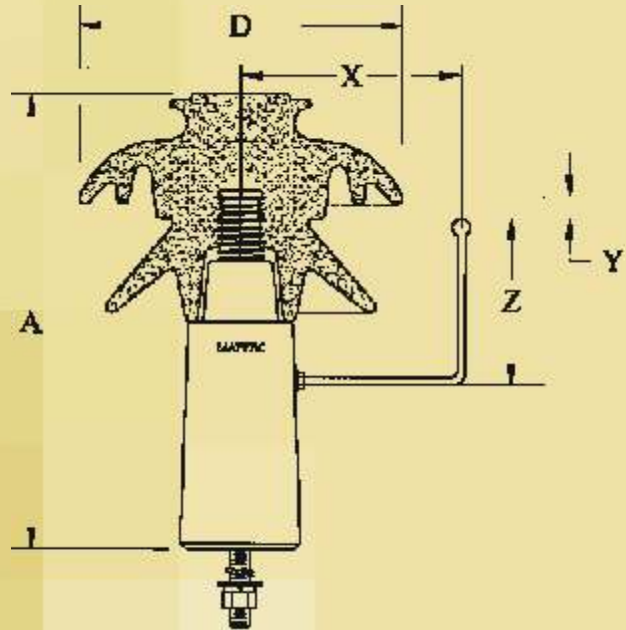

SET SURGE ARRESTER WITH POLYMERIC CONCRETE HOUSING (ADOM 33A) AND PIN INSULATOR OF PORCELAIN ANSI 56-3

DESCRIPTION	
	ADOM 33
RATED VOLTAGE (kV)	34,5
NOMINAL HEIGHT (MM)	384
NOMINAL DIAMETER (MM)	360
NOMINAL VALUE "X" (MM)	204.50
NOMINAL VALUE "Y" (MM)	9.55
NOMINAL VALUE "Z" (MM)	129.50
CFO (+) (kV)	150
DRY FLASHOVER VOLTAGE 60 HZ- (kV)	55
WET FLASHOVER VOLTAGE 60 HZ (kV)	45
MECHANICAL RESISTANCE (kN)	3,924

