


SURGE ARRESTER WITH POLYMERIC CONCRETE HOUSING (AICP 23 LFC)

DESCRIPTION	
	AICP 23
NOMINAL HEIGHT (MM)	253
MAXIMUM DIAMETER (MM)	103
ARC DISTANCE (MM)	50
DIELECTRIC RESISTANCE 5.0 KVCD (MΩ)	1000
NOMINAL CURRENT (kA)	5
MAXIMUM RESIDUAL VOLTAGE (8/20) (kV)	38
PARTIAL DISCHARGE (PC)	<3
MECHANICAL RESISTANCE (kN)	3.924

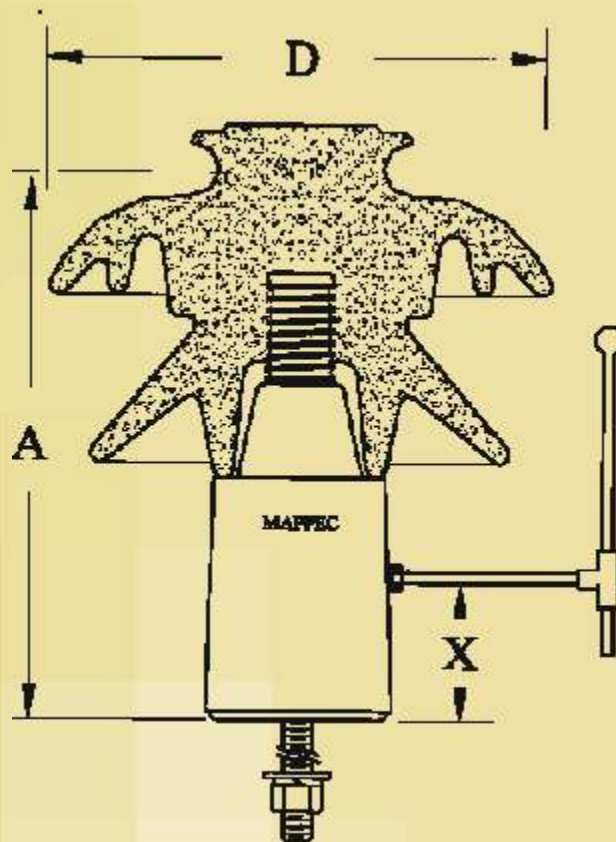

AICP 23 Y AISLADOR ALFILER DE PORCELANA ANSI 56-3

DESCRIPCIÓN DEL CONJUNTO

	AICP 23
Tensión nominal (kV)	23
Altura nominal (mm), (A)	450
Diámetro nominal (mm), (D)	266
Valor nominal "X" (mm)	112
Tensión crítica de flameo al impulso (+), kV	120-135
Tensión de flameo 60 Hz, en seco, kV	50
Tensión de flameo 60 Hz, en húmedo, kV	40
Resistencia al cantiléver, (kN)	3,924